

- Low-Power High-Performance Intel® Celeron® J1800 Quad-Core Processor
- Sleek and Compact Body with Small Footprint
 - Bezel-Free True-Flat PCAP Touch
- 15" Display with LED Backlight Delivering Bright and Crisp Images
 - Multiple I/O Interfaces for Peripherals
- Flexible Installation on a Counter or a Wall
 - Faster Installation and Serviceability
- Modern and Contemporary Styling for Interior Décor
- Engineered and Optimized for Hospitality and Retail Businesses



Features & Benefits



New Look. New Design

- Sleek and Compact. Small Footprint
- Modern and Contemporary Styling



Powerful Performer

- Intel® Celeron® J1800 Quad-Core Processor
- Low-Power High-Performance. Fanless Operation



Superior Touch Display

- Bezel-Free True-Flat 15" LED LCD Display
- PCAP Touch Activated with Fingers and Gloves



Install It Anywhere

- On a Counter or a Wall
- VESA Compatible (Option)



Save Time and Cost

- Easy Access to I/O Interfaces
- Faster Installation and Serviceability



Connect It to All

- Multiple I/O Interfaces
- 6 USB, 5 Serial. Optional Expansion Available

Tunisie

Sfax : Av de la liberté, Im El Ilkan 3^{ème} étage,
B11 CP. 3027
Tél : +216 74 415 055 Fax: +216 74 415 044

Tunis : Tunis : 7, rue du Lac Côme, Imm. Nessima,
1^{er} étage, B1 & B2, Les Berges du Lac, CP.1053.
Tél. : +216 71 655 261

Sousse : Av Yasser Arafat, Résidence
Chaima, 4^{ème} étage, B 401, Sahloul CP. 4054
Tél. : +216 73 368 115

Algérie

Alger : Cooperative camps 2 villa N° 40, kouba
Tél : +213 (0) 23 70 88 08 - MOB : +213 (0) 541 53 06 42

Sénégal

Dakar : 01, Avenue Pasteur, RDC Bloc Pasteur, CP. 10200, Dakar - Sénégal
Tél : +221 33 821 85 38 - Mob : +221 78 147 82 73



Specifications

General Specifications	
System	
CPU	Intel® Celeron® J1800 (2.41 GHz) Quad-Core Processor / Fanless
Chipset	ITE IT8786-I
Storage	SATA 2 (3Gb/s) 2.5 inch SSD 128GB, Support AHCI
Memory	4GB Standard (Max. 8GB) Type: DDR3L 1333 MT/s / Socket 1x SODIMM
Graphics Controller	Integrated Intel HD Graphics
Audio	Realtek ALC662-VD 5.1 CH Audio
LCD Display	
Size / Type	15" TFT LED Backlight
Resolution	1024 x 768
Luminance	300 cd/m ² (typ.)
Touch Screen	
Type	Projective Capacitive Touch
Controller Interface	USB Interface
I/O Interface	
Display Port	1x VGA (With 12V power output)
USB Port	6 (Rear 2, Back 4 / USB 2.0 x 6 Ports), USB A type 1 (Rear 1, Reserved for MSR/SCR/I-Button), RJ-45 (COM1 with 5V/12V power output on 9pins) (COM2-3 RJ-45, Full Signal) (COM4 RJ-11, Only TX/RX, 12V power output, Reserved for CDP) (COM6 RJ-45, Only TX/RX, 5V power output, Reserved for MSR)
Serial Port	5
Ethernet Port	RJ-45
Audio	Line-out
Power DC-IN	1 (4pins connector)
Power Requirement	
Adaptor Input	Adaptor 12V, 5A

OS Support	
OS	Windows 7, Windows 8.1, POS Ready 7, Windows 10
Mechanical & Environmental	
Operating Temperature	0°C ~ 60°C at 10% ~ 90% humidity
Storage Temperature	-20°C ~ 80°C at 10% ~ 90% humidity
Color	Dark Grey, White
Dimensions (W x H x D)	364 x 333 x 210 (mm)
Net Weight	5,300g
Packing Dimension (W x H x D)	500 x 470 x 300 (mm)
Packing Weight	8,000g
Certification	CE, FCC, KC, CB, CCC

Optional Configuration	
Storage	
	2.5 inch SSD 128GB
	2.5 inch HDD 500GB
	2.5 inch HDD 1TB
I/O Expansion	
	1x COM5 (RJ-45 8pins) (Factory Option)
	1x Cash Drawer Port (RJ-11 6pins) (Factory Option)
Customer Display (CDP)	
	VFD (20 columns x 2 lines)
	9.7" 2nd LCD (1024 x 768 resolution)
2nd Display	
	12.1" 2nd LCD (1024 x 768 Resolution)
	15" 2nd LCD (1024 x 768 Resolution)
Magnetic Stripe Reader	
	MSR : Comply with ISO 7811, Support 16 2 & 3 track
Smart Card Reader	
	SCR : EMV level 1, 2
Dallas	
	Dallas I-button Reader
Camera	
	5M USB Interface (Internal) (Factory Option)
Wall Mount Kit	
	VESA-Compatible (75 x 75mm, 100 x 100mm)
Serial Conversion Cable	
	RJ-45 to D-sub 9

*Other mounting options available upon request. *Specifications may change without prior notice.

Peripheral Options



Customer Display
• VFD (2 Lines x 20 Characters)



2nd Display
• 9.7", 12.1", 15" LCD




Multi-Reader
• MSR, SCR



POS Printers
• A7, A11

Dimension View

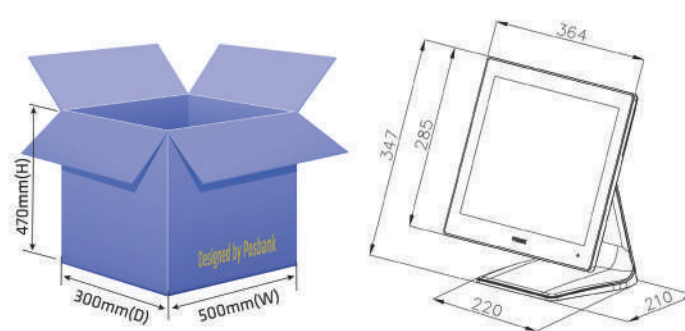

www.asmpos.com
contact@asm.com.tn

Tunisie

Sfax : Av de la liberté, Im El Itkan 3^{ème} étage,
B11 CP. 3027
Tél : +216 74 415 055 Fax: +216 74 415 044

Tunis : Tunis : 7, rue du Lac Côme, Imm. Nessima,
1^{er} étage, B1 & B2, Les Berges du Lac, CP.1053.
Tél. : +216 71 655 261

Sousse : Av Yasser Arafat, Résidence
Chaïma, 4^{ème} étage, B 401, Sahloul CP. 4054
Tél. : +216 73 368 115

Algérie

Alger : Cooperative comps 2 villa N° 40, kouba
Tél : +213 (0) 23 70 88 08 - MOB : +213 (0) 541 53 06 42

Sénégal

Dakar : 01, Avenue Pasteur, RDC Bloc Pasteur, CP. 10200, Dakar - Sénégal
Tél : +221 33 821 85 38 - Mob : +221 78 147 82 73

